



**CONCRETE
COATINGS** INC.™
restore • re-invent • revive™

beyond the **SURFACE**™




- Quality Products Since 1996 • Your Decorative Concrete Coatings Manufacturer
- Comprehensive Training, Outstanding Service and Superior Support

1105 N. 1600 W. Layton, UT 84041 • www.ConcreteCoatingsInc.com
Toll 801-544-8771 • Toll Free 800-443-2871 • Fax 801-544-5896



Table of Contents

INTRODUCTION	2
ACRYLIC SEALER PRODUCTS	3
URETHANE SEALER PRODUCTS	4
EPOXY FLOORING PRODUCTS	5
EPOXY ACCESSORIES	6
GROUTS, MORTARS AND MICRO-TOPPINGS	7
POLYMER BINDERS, MODIFIERS AND BONDERS	8
OVERLAY AND MICRO-TOPPING COLORANTS	9
ACID STAINS	10
STENCIL PATTERNS	11-12
MAINTENANCE PRODUCTS	13
MISCELLANEOUS PRODUCTS	14
SUPPORT PRODUCTS, AIDS AND SAMPLES	15-16
MANUFACTURING, SUPPORT AND SERVICES	17-18

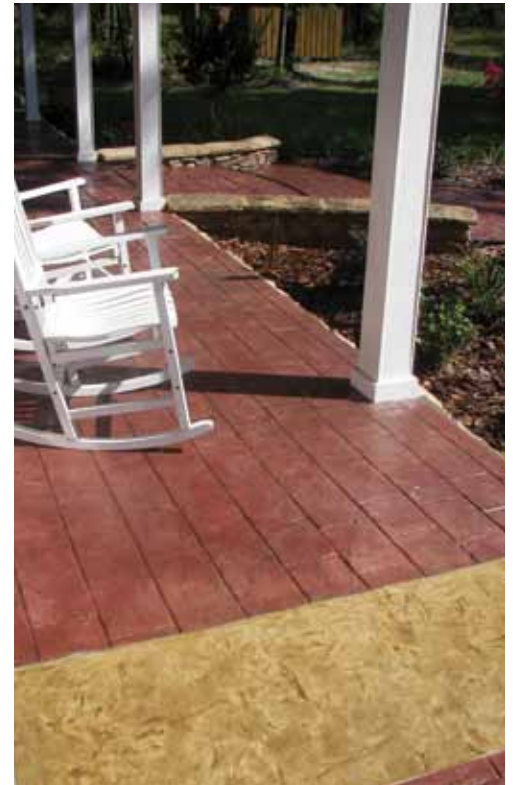

Stampable Overlay and Micro-Topping



SuperSeal™ 2000



Dear Valued Customer,

The Concrete Coatings' Product Catalog you are reading represents our finest product line. With over fifteen years of installation and manufacturing experience, along with the latest technology and innovation, we are able to provide our customers with the best products available.


After listening to our customers we added to our line of products thus giving our customers the very most for their money. We feel it is important to provide a product line that works well together, that is user friendly and will provide years of satisfaction and enjoyment.

Customer Service defines Concrete Coatings Inc. We offer numerous training seminars for new and experienced installers. Seminars demonstrate the ease of application, new techniques and ensure our customer's success. Our technical support staff have been installers themselves increasing their abilities to identify and solve problems as they occur. We take pride in our products and want our customers to have the same experience. In providing exceptional technical support and unprecedented customer service, we are set apart from all others in our industry.

Concrete Coatings will continue to research and develop new, innovative products; deliver the quality products you expect; and provide the industry's best customer service. We thank you for your outstanding response to our company, for using our products, and we look forward to hearing from you soon.

Best wishes,

S. Alan Christensen
President/CEO
Concrete Coatings Inc.

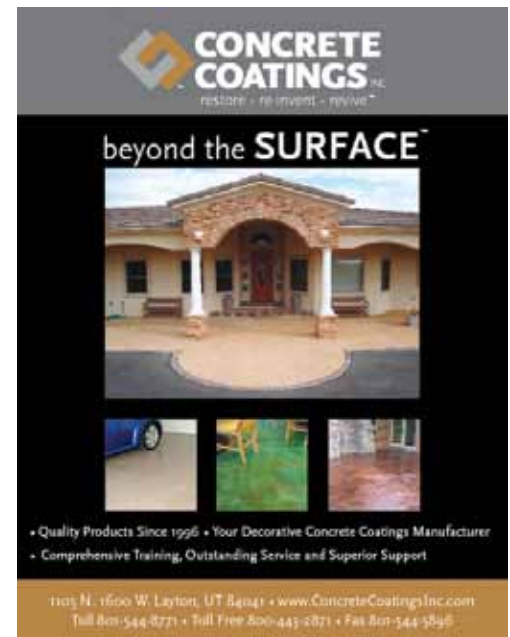



Acrylic Sealer Products

SUPERSEAL™ 2000 600 VOC

(Not available in all areas)

This is an aromatic acrylic sealer that can be applied to almost any surface; concrete, tile, cementitious overlays and much more. European resins make this the sealer of choice. This sealer is quick drying.

*Finish: Gloss "Wet Look." Packaging: 1-gallon can, 5-gallon pail and 55-gallon drum.
Coverage: 150-200 square feet per gallon.*

GEMKOTE™ 400 VOC, 350 VOC AND 100 VOC

The same resin as SuperSeal™ 2000 with a VOC content less than 400 g/l, 350 g/l or 100 g/l for local regulations requiring a lower VOC. Due to the unique solvent formulation, this is typically a faster drying product.

*Finish: Gloss "Wet Look." Packaging: 1-gallon can, 5-gallon pail and 55-gallon drum.
Coverage: 150-200 square feet per gallon.*

SUPERSEAL™ 20WB

This is a water-based acrylic sealer for general everyday use. This product should be used when a solvent based product cannot be used due to safety or flammability concerns. Unique cross-linking makes Super-Seal™ 20WB superior to other water-based sealers on the market.

Finish: Matte. Packaging: 1-gallon can, 5-gallon pail and 55-gallon drum. Coverage: 200-300 square feet per gallon.

PROSEAL™ 18 600 VOC AND 400 VOC

ProSeal™ 18 is a non-yellowing acrylic solvent-based sealer that aids the curing process of freshly placed concrete. Actual curing and sealing agents are usually meant as a sacrificial coat and are often required to be removed before applying a finish sealer. ProSeal™ 18 contains the same resin as SuperSeal™ and GemKote™ thereby allowing complete compatibility with these sealers. (Available with a VOC content less than 100 g/l upon request.)

Finish: Gloss. Packaging: 1-gallon can, 5-gallon pail and 55-gallon drum. Coverage: 150-200 square feet per gallon.

Note: All of the above products are available in Satin and Matte finishes for a reasonable fee.



<u>Product Code</u>	<u>Packaging</u>
AS-2000-1	SuperSeal™ 2000 600 VOC, 1 Gallon Can
AS-2000-5	SuperSeal™ 2000 600 VOC, 5 Gallon Can
AS-2000-55	SuperSeal™ 2000 600 VOC, 55 Gallon Drum
AS-400-1	GemKote™ 400 VOC, 1 Gallon Can
AS-400-5	GemKote™ 400 VOC, 5 Gallon Can
AS-400-55	GemKote™ 400 VOC, 55 Gallon Drum
AS-100-1	GemKote™ 100 VOC, 1 Gallon Can
AS-100-5	GemKote™ 100 VOC, 5 Gallon Can
AS-100-55	GemKote™ 100 VOC, 55 Gallon Drum
S-20WB-1	SuperSeal™ 20WB, 1 Gallon Can
S-20WB-5	SuperSeal™ 20WB, 5 Gallon Can
S-20WB-55	SuperSeal™ 20WB, 55 Gallon Drum
AS-350-1	GemKote™ 350 VOC, 1 Gallon Can
AS-350-5	GemKote™ 350 VOC, 5 Gallon Can
AS-350-55	GemKote™ 350 VOC, 55 Gallon Drum



VIVID™ Acid Stain



Urethane Sealer Products

SUPERGLAZE™ VOC

This is a single-component moisture-cure urethane that is the sealer used for commercial applications. Heavy bodied for easy application and leveling, it has a very high gloss and is extremely durable. With its moisture cure mechanism, SuperGlaze™ VOC will cure as fast as atmospheric conditions permit.

Finish: High-Gloss. Packaging: 5-gallon pail and 55-gallon drum.

Coverage: 250-300 square feet per gallon.

SUPERGLAZE™ WBU

This is a single or dual-component water-base urethane for any commercial or residential application. Very low VOC content and quick drying properties with no odor. Add the Q-43 Acrylic Cross-linker for dual-component properties that dramatically enhance its durability. Unlike most two-component urethanes, adding Q-43 won't render the remaining material unusable. Simply close the lid tight, and add the cross-linker again prior to your next use!

Finish: Gloss. Packaging: 5-gallon pail and 55-gallon drum.

Coverage: 300-400 square feet per gallon.



SUPERGLAZE™ 3600

This is a dual-component commercial/industrial polyurethane for maximum durability and chemical resistance. Easy to mix, use and apply. Cures to a hard, high gloss finish and is designed to take the abuse of extreme environments. Fast cure time allows quick turn-around.

Finish: High-Gloss. Packaging: 1-gallon pail and 5-gallon pail.

Coverage: 200-300 square feet per gallon.

<u>Product Code</u>	<u>Packaging</u>
SG-3000	SuperGlaze™ VOC, 5 Gallon Can
SG-3000-55	SuperGlaze™ VOC, 55 Gallon Drum
S-SGWBU-5	SuperGlaze™ WBU, 5 Gallon Can
S-SGWBU-55	SuperGlaze™ WBU, 55 Gallon Drum
SG-3600	SuperGlaze™ 3600, 1 Gallon Can
SG-3600-5	SuperGlaze™ 3600, 5 Gallon pail



Shield™ Epoxy Flooring



SHIELD 50™ General Purpose Primer and Resurfacer

This epoxy is a 100% solids and 100% cross-linked product that can be applied to almost any surface: concrete, wood, tile, stone, etc. It can be used as a primer under a polyurethane application or UV Shield™ topcoat. This product can also be pigmented and used as a primer or topcoat. Unlike most other 100% solids epoxies, Shield 50™ contains no fillers or carriers and its cross-linking provides maximum durability, wearability, adhesion and increased UV resistance. Mix ratio is 2:1 A:B.

Packaging: 1, 3, 5, 15 and 150-gallon kits. Coverage: Average 150 square feet per gallon.

Product Codes and Packaging: EP-S50-1 (Straw, 1 Gal.) EP-S50-1P (Color, 1 Gal.) EP-S50-3 (Straw, 3 Gal.) EP-S50-3P (Color, 3 Gal.) EP-S50-5 (Straw, 5 Gal.) EP-S50-5P (Color, 5 Gal.) EP-S50-15 (Straw, 15 Gal.) EP-S50-15P (Color, 15 Gal.) EP-S50-150 (Straw, 150 Gal.) EP-S50-150P (Color, 150 Gal. by special order)

UV SHIELD™ UV Resistant Topcoat

Historically, epoxies have not been UV stable. In a recent test of 500 continuous hours of direct UV exposure, a clear application of UV Shield™ showed no visible color degradation. It is used mainly as a clear coat over full or partial flake or quartz systems. UV Shield™ is also easily applied pigmented for use as a colored topcoat that will not show the effects of UV exposure that is common to epoxies. Mix ratio is 2:1 A:B.

Packaging: 1, 3, 5, 15 and 150-gallon kits. Coverage: 100-200 square feet per gallon.

Product Codes and Packaging: EP-UVC-1 (Straw, 1 Gal.) EP-UVC-1P (Color, 1 Gal.) EP-UVC-3 (Straw, 3 Gal.) EP-UVC-3P (Color, 3 Gal.) EP-UVC-5 (Straw, 5 Gal.) EP-UVC-5P (Color, 5 Gal.) EP-UVC-15 (Straw, 15 Gal.) EP-UVC-15P (Color, 15 Gal.) EP-UVC-150 (Straw, 150 Gal.) EP-UVC-150P (Color, 150 Gal. by special order)

CR-FLEX™ Flexible Crack Repair and Joint Filler

Now you can create seamless epoxy floors by installing CR-Flex™ in all control joints prior to the flooring application. Can be applied to cracks as well. CR-Flex™ expands and contracts with the concrete without breaking the bond within the joint. CR-Flex™ won't have to be replaced year after year, like most caulks. Mix ratio is 1:1 (equal parts).

Packaging: 2-part side-by-side cartridge with static mixing nozzle, 2 and 10-gallon kits.

CR-204™ Medium Viscosity Crack Repair

CR-204™ is a 100% solids, medium viscosity, moisture insensitive, low modulus, high strength epoxy designed specifically for small to medium size cracks. At its standard cure, it is very user friendly. Its low modulus provides excellent adhesion to the walls of the void. Mix ratio is 2:1 A:B.

Packaging: 2-part side-by-side cartridge with static mixing nozzle, 1-gallon kit.

CR-FAST™ Fast Setting Crack Repair and Void Filler

CR-FAST™ is a fast-setting crack & void filler. The ultra-low viscosity of CR-FAST™ allows for deep penetration into micro-capillaries of concrete. When combined with selected aggregate, CR-FAST™ provides a high strength repair.

Packaging: 2-part side-by-side cartridge with static mixing nozzle, 2 and 10 gallon kits.

Product Code	Packaging
CR-FLEX	CR-FLEX Flexible Crack Repair/Joint Filler, 1:1 Cartridge
CR-FLEX-G	CR-FLEX Flexible Crack Repair/Joint Filler, 1:1 2 Gallon Kit
CR-FLEX-10	CR-FLEX Flexible Crack Repair/Joint Filler, 1:1 10 Gallon Kit
CR-FAST	CR-FAST Ultra Fast Setting Crack Repair 1:1 Cartridge
CR-FAST-G	CR-FAST Ultra Fast Setting Crack Repair 1:1 2 Gallon Kit
CR-FAST-10	CR-FAST Ultra Fast Setting Crack Repair 1:1 10 Gallon Kit
CR-204	CR-204 Medium Viscosity Crack Repair 2:1 Cartridge
CR-204-G	CR-204 Medium Viscosity Crack Repair 2:1 1 Gallon Kit





Decorative Epoxy Flooring Accessories

DECORATIVE ACRYLIC BROADCAST FLAKES

For installing partial random or full broadcast flake floors. These flakes are available in a full spectrum of colors. Flakes can be combined in any combination for unlimited color choices.

Packaging: 10 or 50 lb. boxes in single colors or pre-blended. Coverage: Varies – Call for details.

Acrylic broadcast flake 10 lb. box or 50 lb. box. Product codes listed under blends.



Black & White Blend EP-FLK 510 EP-FLK550



Brown Blend EP-FLK 610 EP-FLK650



Gray Blend EP-FLK 210 EP-FLK250



Sahara Blend EP-FLK 410 EP-FLK450



Blue Blend EP-FLK 110 EP-FLK150



Beige Blend EP-FLK 310 EP-FLK350

DECORATIVE COLORED QUARTZ


Urethane-coated semi-angular quartz sand for installing full broadcast decorative flooring.

Packaging: 50 lb. boxes in single colors or pre-blended. Coverage: Varies – Call for details.

Urethane-coated colored quartz sand 50 lb. box. Product codes listed under blends. *8 - 50 lb. bags required for quartz blends. 1 - 50 lb. bag minimum order on solid quartz.



Cream Blend EP-QTZ350

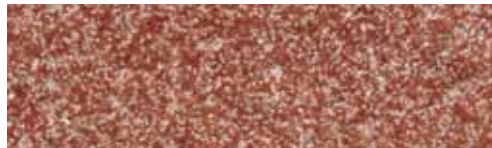

Red Blend EP-QTZ150



Natural Blue Blend EP-QTZ550



Mocha Blend EP-QTZ450



Gray Blend EP-QTZ250



Brown Blend EP-QTZ650

PIGMENT COLORS

These colors are for presentation only. Pigmented epoxy available by request. Please call for Product codes.



Concrete Gray



Medium Gray



Dark Gray



Sand Beige



Tan



G-100 PROFESSIONAL SERIES GROUT MIX™

Our standard general purpose grout mix. Combine with any of our DuraSet™ polymers for general patching or as a troweled and/or sprayed overlay. Accepts our C-100 colorants perfectly, and has a special sand gradation to make it very easy to use for a multitude of applications. Recommended for applications 1/4" or less.

Packaging: 50 lb bag – 60 bags per pallet. Coverage: 100-200 square feet per bag.

FAST-PATCH™ Rapid Setting Mortar

A fast setting mortar that can be applied from feather edge to 12" or more. Cures in less than an hour, and can be driven on in less than 24 hours. At a cured rate of twice the strength of standard concrete (approx. 7,000 psi), FastPatch™ is repair mortar for everything from a small chip to a large pothole.

Packaging: 50 lb bag – 54 bags per pallet. Coverage: 25 square feet at 1/4" per bag.



MICRO-TOPPINGS

Micro-toppings have a fine consistency. They are available in white or natural gray and are forgiving and easy to apply. The most common uses are floors where an acid stain is desired, when the concrete itself is too abused to allow for a pristine surface. A quick trowel application of a Micro-topping creates a surface perfectly suitable for staining. Concrete Coatings Inc. Micro-Toppings are available in smooth and rough grades.

Packaging: 50 lb bag – 56 bags per pallet. Coverage: 200-400 square feet per bag.

STAMP-TEK™ Stampable Overlay

Stamp-Tek™ Stampable Overlay is a dry polymer mix that creates the look of newly stamped concrete over existing concrete surfaces. These overlays come in white or gray (natural) and work with color hardeners, powdered or liquid releases and acid stains.

Packaging: 50 lb bag – 56 bags per pallet. Coverage: 24 square feet at 1/4", 12 square feet at 1/2", 8 square feet 3/4" per bag.



Before



After

Fast Patch™ and Spray-Tek Acrylic Overlay™ System

Product Code	Packaging
G-100	Pro-Series Grout Mix™ 50 Lb. Bag
FP-1060	Fast-Patch™ 55 Lb. Bag
MT-SG-W	Micro-Topping 50 Lb. Bag
MT-SG-G	Micro-Topping 50 Lb. Bag
MT-RG	Micro-Topping 50 Lb. Bag (For use with Gray or White smooth grade.)
STMP-OLW	Stamp-Tek™ Overlay 50 Lb. Bag
STMP-OLG	Stamp-Tek™ Overlay 50 Lb. Bag



DURASET™ 1000 Modified Acrylic Resin

An all-acrylic resin designed specifically for binding of cementitious materials including overlays, mortars, and grouts. This resin is comprised entirely of high-quality European resins. DuraSet™ products are easy to use. In addition to acting as a binder for Spray-Tek Acrylic Overlay™ System and other overlays, it can be used with our C-Series colorants when performing faux finishing techniques. It is also commonly used as a primer for overlays.

Packaging: 5-gallon pail and 55-gallon drum.

Coverage: 400-800 square feet dependent on application.

DURASET™ 1001 – FastSet™ Modified Acrylic Resin

An all-acrylic resin identical to its counterpart DuraSet™ 1000, only in a faster-setting formula for cooler days, or when a faster drying time is preferred. DuraSet™ 1001 can be combined at any ratio with DuraSet™ 1000 to accelerate drying time.

Packaging: 5-gallon pail and 55-gallon drum.

Coverage: 400-800 square feet dependent on application.

DURASET™ VAE Vinyl Acetate Ethylene Resin

A 100% Vinyl Acetate Resin designed specifically for thicker polymerized overlays, or mortar patches. VAE resins are a time-tested technology and are best known for their adhesion and performance when thicknesses exceed 1/4". (An all-acrylic binder is recommended for applications of 1/4" or less.) Recommended as a primer for all stampable overlay products. As a VAE, it is capable of being re-emulsified only one time, allowing subsequent applications to adhere very well, yet eventually forming a tough, durable and long lasting binder or film.

Packaging: 5-gallon pail and 55-gallon drum. Coverage: 200-300 square feet per gallon.



Spray-Tek Acrylic Overlay™ with SuperSeal™ 2000

Product Code	Packaging
M-1000-5	DuraSet™ 1000 5 Gallon Container
M-1000-55	DuraSet™ 1000 55 Gallon Drum
M-1001-5	DuraSet™ 1001 FastSet 5 Gallon Container
M-1001-55	DuraSet™ 1001 FastSet 55 Gallon Drum
M-VAE-1	DuraSet™ VAE 1 Gallon Pail
M-VAE-5	DuraSet™ VAE 5 Gallon Container
M-VAE-55	DuraSet™ VAE 55 Gallon Drum



C-SERIES LIQUID COLORANTS

Add C-100 Colorants to any cementitious mix, and you have a color that is solid throughout the entire matrix, not just on the surface. Designed specifically for addition to G-100 Series Grouts and Micro-Toppings, they can be added to almost any cement-type mixture.



Natural Gray C-106



Coral C-118



Wheat C-120



Antique White C-101



Platinum Gray C-107



Sandy Beige C-124



Mocha C-126



Putty C-125



Light Oxford Gray C-110



Salmon C-117



Desert Beige C-113




Almond C-119



Noble Gray C-127



Sahara C-122

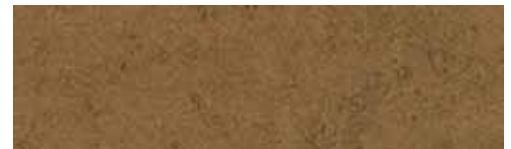

Brown C-112



Sand C-102



Dark Gray C-108



Burnt Sienna C-103



Chocolate C-111



Bright Blue C-115



Oxford Gray C-109



Terra C-123



Forest Green C-114



Bright Red C-116

Colors not shown are black, white and green. Packaging: 1 Quart Bottle, 1 Gallon pail. Coverage: Varies based on mix and color used. Please call technical support for guidance. Custom colors are available. Provide us a sample of your color and we will make it.

Please note that the colors shown here are for casual reference only to demonstrate the variety of the color spectrums. These colors are shown on G-100 grout. This color chart should not be used for color matching.



VIVID™ ACID STAINS

VIVID™ Acid Stain reacts with concrete to produce a color that will not peel, chip or fade. VIVID™ Acid Stain leaves little residue, making it easier to clean up than other acid stains on the market.

Packaging: 1-gallon Jug, 5-gallon Carboy (available by special order.) 4oz sample bottles available in 8 packs of one color or packs of all 11 colors.

GEMSTAIN™

GemStain™ is applied the same way as our regular acid stain yet contains no Hydrochloric Acid. GemStain™ is shipped as a non-hazardous material if shipped by truck or rail.

Packaging: 1-gallon Jug, 5-gallon Carboy. 4oz sample bottles available in 8 packs of one color or packs of all 11 colors. Turquoise not available in GemStain™



*Turquoise not available in GemStain™. This chart is a representation only and does not guarantee that the final color will be an exact match or even reasonably close to the sample. The colors produced will rely heavily on skill, practice and experimentation. Each concrete slab will react differently. Application methods and age of the concrete will result in different tones or hues and in the case of very old concrete: the stain may have little or no reaction. Even in a controlled environment, cements, aggregates, water content, and concrete curing methods will contribute to different results. Test sections should be done to verify suitability and appearance prior to general application.

QUICKDYE™

QuickDye™ is an alternative to chemical stains. This product is easy to apply and can be sealed quickly. QuickDye™ is mixed with acetone so it is important to have adequate ventilation and airflow. Use for small stain jobs or as a touch up for acid stain. Additional enhancer is available for a richer, more vibrant color.


Packaging: QuickDye™ Powder 8 oz. bottle. Penetrating additive 20 oz. bottle. Coverage: 400-600 square feet per gallon per coat. Varies based on concrete texture and mix.

QuickDye™ Special Order Colors



QD-100 thru QD-1100 each color will correspond with the colors of our acid and GemStain™ i.e. Ebony is QD-600 and Weathered Terracotta is QD-1100.

QuickDye™ In Stock and Ready to Ship

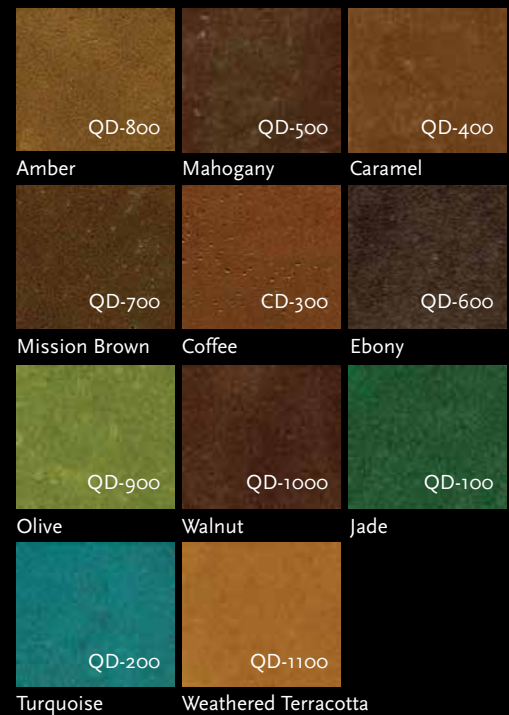




Original Herringbone with Small Brick Rosette




Cobble Header




Face Brick




LARGE KEYSTONE
LARGEST STONE SIZE: 12" X 10"
ROLL WIDTH: 35" JOINT WIDTH: 1/2" - 1"




BUSHROCK
AVERAGE STONE SIZE: 16" X 10"
ROLL WIDTH: 36" JOINT WIDTH: 1/2"




FLAGSTONE
LARGEST STONE SIZE: 14" X 11"
ROLL WIDTH: 32" JOINT WIDTH: 1/2" - 1 3/4"




ANTIQUE COLONIAL
AVERAGE BRICK SIZE: 5 3/8" X 13 1/2"
ROLL WIDTH: 36" JOINT WIDTH: 1/4" - 1"




KEYSTONE
LARGEST STONE SIZE: 11" X 8"
ROLL WIDTH: 33" JOINT WIDTH: 1/2" - 1 1/4"




RUSTIC ASHLAR
LARGEST STONE SIZE: 12" X 10"
ROLL WIDTH: 35" JOINT WIDTH: 1/2" - 1"




ASHLAR TILE
LARGEST TILE SIZE: 12 1/4" X 11 1/4"
ROLL WIDTH: 37" JOINT WIDTH: 1/2" - 1"




ENGLISH COBBLE
AVERAGE BRICK SIZE: 11 3/4" X 4"
ROLL WIDTH: 32" JOINT WIDTH: 1/2" - 1"



EUROPEAN FAN
BRICK SIZE: RANDOM
ROLL WIDTH: 33" JOINT WIDTH: 1/2" - 3/4"




FACE BRICK
BRICK SIZE: 2 3/16" X 7 7/8"
ROLL WIDTH: 36 7/8" JOINT WIDTH: 7/16"




MEDITERRANEAN
OCTAGON: 21" X 13 7/8"
ROLL WIDTH: 32" JOINT WIDTH: 1/2"




RIVERSTONE
AVERAGE STONE SIZE: 13" X 9"
ROLL WIDTH: 35" JOINT WIDTH: 1/2" - 3"




COBBLE FAN
BRICK SIZE: RANDOM
ROLL WIDTH: 34" JOINT WIDTH: 1/2" - 3/4"




RUNNING BOND
BRICK SIZE: 4" X 7 3/4"
ROLL WIDTH: 36 1/2" JOINT WIDTH: 1/2"




10" OCTAGON TILE
OCTAGON DIAMETER: 10 1/4"
ROLL WIDTH: 33 1/2" JOINT WIDTH: 11/16"




ROMAN PAVER
AVERAGE BRICK SIZE: 10" X 5 1/2"
ROLL WIDTH: 34" JOINT WIDTH: 1/2"




ORIGINAL HERRINGBONE
BRICK SIZE: 3 1/2" X 7 3/4"
ROLL WIDTH: 33 1/2" JOINT WIDTH: 1/2"




BASKET WEAVE
BRICK SIZE: 3 1/2" X 7 3/4"
ROLL WIDTH: 33 1/2" JOINT WIDTH: 1/2"




FLANDERS WEAVE
FULL BRICK SIZE: 4 7/8" X 10 1/2"
ROLL WIDTH: 33" JOINT WIDTH: 1/2"




COBBLESTONE
BRICK SIZE: 4 15/16" X 7 7/8"
ROLL WIDTH: 33" JOINT WIDTH: 1/2"




MEDIUM TILE
TILE SIZE: 7 3/4" X 7 3/4"
ROLL WIDTH: 33 1/2" JOINT WIDTH: 1/2"



LARGE TILE
TILE SIZE: 10 1/2" X 10 1/2"
ROLL WIDTH: 33 1/2" JOINT WIDTH: 1/2"



16-INCH DIAMOND TILE
LG. TILE SIZE: 16"X16" INNER TILE 4"X4"
ROLL WIDTH: 33 1/2" JOINT WIDTH: 1/2"



COBBLEBRICK
AVERAGE BRICK SIZE: 5 1/2" X 8 1/2"
ROLL WIDTH: 37" JOINT WIDTH: 1/2" - 3/4"

AVAILABLE IN 1000 SQ. FT. & 500 SQ. FT. BOXES



Cobblestone



EDGE BRICK HEADER
BRICK SIZE: 4 1/8" x 8 15/16"
ROLL WIDTH: 5 1/8" JOINT WIDTH: 1/2"



BRICK HEADER
BRICK SIZE: 3 7/8" x 7 5/8"
ROLL WIDTH: 8 3/4" JOINT WIDTH: 1/2"



COBBLE HEADER
BRICK SIZE: 4 3/4" x 7 1/2"
ROLL WIDTH: 8 5/8" JOINT WIDTH: 1/2"



HERRINGBONE HEADER
BRICK SIZE: 3 3/8" x 7 5/16"
ROLL WIDTH: 8 9/16" JOINT WIDTH: 1/2"




18-INCH FLAGSTONE BORDER
STONE SIZE: RANDOM
ROLL WIDTH: 18" JOINT WIDTH: 1/2"




BUSHROCK HEADER
STONE SIZE: RANDOM
ROLL WIDTH: 11 7/16" JOINT WIDTH: 1/2"




KEYSTONE HEADER
STONE SIZE: RANDOM
ROLL WIDTH: 8 1/2" JOINT WIDTH: 1/2"




SMALL BRICK ROSETTE
DIAMETER: 2' 11 1/2"
JOINT WIDTH: 1/2"




INCA SUN
DIAMETER: 2' 11 1/2"
JOINT WIDTH: 1/2"




UNIVERSAL CIRCLE
DIAMETER: 2' 11 1/2"
JOINT WIDTH: 1/2"

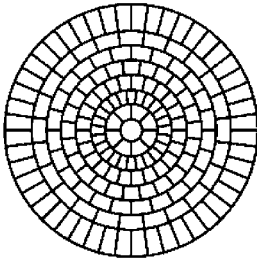


BRICK ROSETTE
DIAMETER: 5' 5 1/4"
JOINT WIDTH: 1/2"




COMPASS
DIAMETER: 5' 5" JOINT WIDTH: 1/2"
DETACHABLE LETTERS INCLUDED (N.S.E.W.)

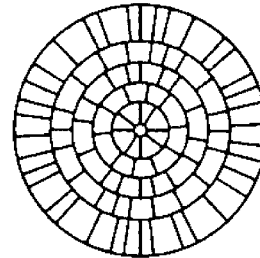


COBBLE CIRCLE
DIAMETER: 5' 5"
JOINT WIDTH: 1/2"

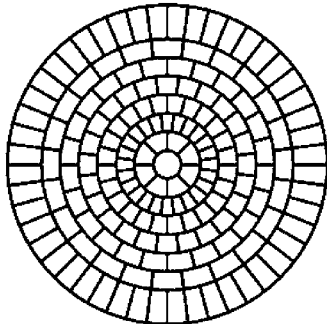

LARGE BRICK ROSETTE
DIAMETER: 7' 2"
JOINT WIDTH: 7/8"



DIAMOND
OVERALL SIZE: 5' 2" TIP TO TIP
TILE SIZE: 6"
JOINT WIDTH: 1/2"

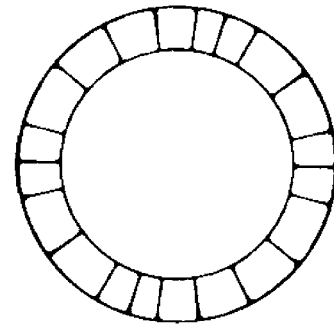

COBBLE CIRCLE RING
DIAMETER 7' 2"
JOINT WIDTH: 1/2"

- CUSTOM-CUT STENCILS AVAILABLE IN PAPER, ADHESIVE BACKED and HEAVY VINYL -
DECORATIVE BORDERS, CORNER ACCENTS, COMPANY LOGOS,
FAMILY CRESTS, MONOGRAMS and more



CCI DRI-LOOK™ *Masonry Seal*

Designed specifically for brick and manufactured stone surfaces to provide an invisible barrier against water and the elements, yet leave the natural look of these surfaces with no visible sheen. Micronized polymers provide all the necessary protection and to extend the life of these surfaces.

Packaging: 1-gallon jug, 5-gallon carboy and 55-gallon drum. Coverage: 600 square feet per gallon (sprayed).

DURAWAX™ *Acrylic Floor Wax*

DuraWax™ is an acrylic wax that provides a tough sacrificial coat that absorbs wear and makes long-term floor maintenance easier. DuraWax™ is easy to apply and may be re-applied several times without stripping previous applications. This product may be applied on SuperSeal™, SuperGlaze™ and GemKote™ sealers as well as UV Shield™ epoxy.

Packaging: 1-gallon jug, 5-gallon carboy and 55-gallon drum. Coverage: 1,000-3,000 square feet per gallon.

CONCRETE EFFLORESCENCE AND ANTIQUE RELEASE REMOVER *Concrete Cleaner*

Concrete Coatings, Inc. Efflorescence Remover and Antique Release is a biodegradable concrete cleaner. This product removes cement-scale and antique release. It may be applied with a brush or a sprayer.

Packaging: 1-gallon jug.

Coverage: 100-400 feet per gallon as an efflorescence remover and 200-800 feet per gallon as an antique release remover.



Spray-Tek Acrylic Overlay™ System



Product Code	Packaging
S-DRILK-1	CCI Dri-Look™ Masonry and Stone Waterproofer 1 Gallon Jug
S-DRILK-5	CCI Dri-Look™ Masonry and Stone Waterproofer 5 Gallon Carboy
S-DRILK-55	CCI Dri-Look™ Masonry and Stone Waterproofer 55 Gallon Container
S-DWAX-1	DuraWax™ Finish Wax 1 Gallon Jug
S-DWAX-5	DuraWax™ Finish Wax 5 Gallon Carboy
S-DWAX-55	DuraWax™ Finish Wax 55 Gallon Container
ER-1	Efflorescence remover 1 Gallon Jug




STAMP-TEK™ Liquid Release Agent

Stamp-Tek™ Liquid Release Agent has a unique blend of ingredients to provide an excellent bond breaker, yet will leave no residue of any kind. Looks, feels and smells just like the old reliable bubble gum standby, but the difference will be obvious to the trained professional.

Packaging: 1- gallon jug, 5-gallon carboy and 55-gallon drum.

Coverage: 150-250 square feet per gallon.

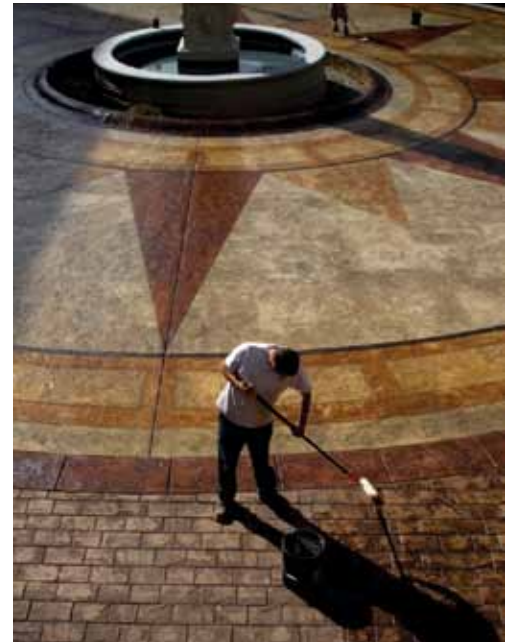

GemKote™ 400

DURASEAM™ Rubber Membrane

DuraSeam™ is a liquid underlayment that prepares countertop substrate for Concrete Coatings, Inc. overlay systems. It moves, bends and breathes to make the substrate and overlay act as one. Use with wood as a seam filler before application of Concrete Coatings, Inc. micro-topping or GraniteLook™ on interior applications.

Packaging: 1-gallon container, 5-gallon container. Coverage: Varies based on application.

GRANITELOOK™

GraniteLook™ is an innovative product formulated to be blended with our C-series colorants to create a granite-like appearance. Use as an economic alternative to expensive countertops. This product is applied in conjunction with DuraSeam™, Concrete Coatings, Inc. cementitious overlays and Shield™ epoxy.

Packaging: 1-gallon container. Coverage: 500-1,000 square feet per gallon.

<u>Product Code</u>	<u>Packaging</u>
LR-1	Stamp-Tek™ Liquid Release Agent 1 Gallon Jug
LR-5	Stamp-Tek™ Liquid Release Agent 5 Gallon Carboy
LR-55	Stamp-Tek™ Liquid Release Agent 55 Gallon Container
GL-1	GraniteLook™ 1 Gallon Jug
DS-1	DuraSeam™ Universal Primer 1 Gallon Container
DS-5	DuraSeam™ Universal Primer 5 Gallon Container



GraniteLook™



VIVID™ Acid Stain with UV-Shield™ Epoxy and DuraWax™



Indoor/Outdoor Distributor Banner



T-Shirts and Hats.



Distributor Binder


- Catalog
- Corporate Brochure
- Product Cut Sheets
- MSDS and TDS Sheets



*Visual Software available for purchase
and resale to contractors*



Finished Acid Stain Sample Chips: 11 Standard Colors

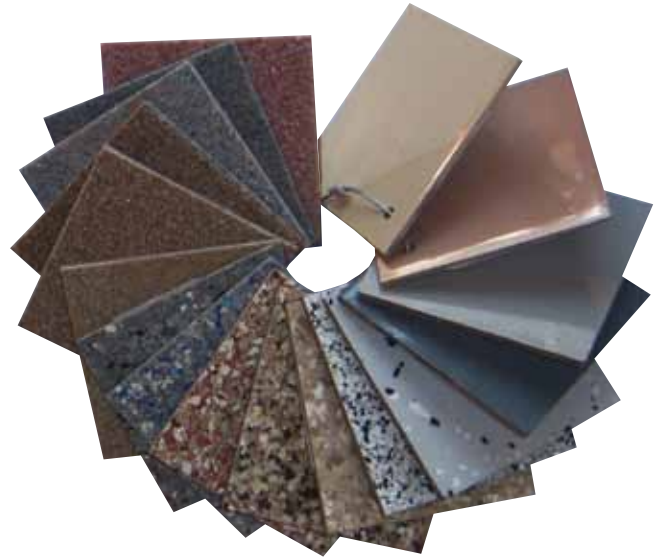

*Epoxy Sample Chip Set: All Flake
and Quartz Blends and Pigment Colors*



Acrylic Sample Chip Set: 27 Standard Colors



*Liquid Acid Stain Sample Kit:
All 11 Colors 4 oz. Bottles*



Training • Technical Support • Service

NATIONWIDE SALES SUPPORT AND SERVICE

Concrete Coatings Inc. is dedicated to sales support and customer service as part of our commitment to you. Contact our Inside Sales Group, at 800-443-2871 or contact your local Sales Representative directly, current contact information can be accessed at www.ConcreteCoatingsInc.com.

DEMONSTRATIONS AND TRAINING

Our Sales Coordinators and Sales Managers will arrange on-site demonstrations at distributor locations. Contact your local Concrete Coatings Inc. distributor or your Concrete Coatings Inc. Sales Representative to inquire about other training opportunities.

Concrete Coatings Inc. offers basic and advanced training at our headquarters and satellite locations for each of our product systems. Check www.ConcreteCoatingsInc.com to check dates and fees. Registration may be completed by phone, mail and fax. Call today to register.



Training Provided at Concrete Coatings Inc. Headquarters



Literature Folders and Pens Provided for Training and Demonstration



MANUFACTURING AND SHIPPING

We manufacture our products, which gives us an edge over other suppliers. Due to our experience, we can provide product to you quickly. We work hard to ensure you pay the least possible amount for shipping with the connections we have in the shipping industry. Our manufacturing capabilities insure product delivery of any size, large or small.



24/7 World Class Technical and Product Support

TECHNICAL SUPPORT

There are multiple contact options when it comes to technical questions at Concrete Coatings Inc. You may call our manufacturing headquarters at 1-800-443-2871 and reach a technical support specialist knowledgeable in our product line; our Sales Representatives and Regional Managers are also available to help you out with your needs.



Concrete Coatings Inc. 2009 World of Concrete Trade Show



Distributed by:



**CONCRETE
COATINGS** INCTM
restore • re-invent • reviveTM

1105 N. 1600 W. Layton, UT 84041

www.ConcreteCoatingsInc.com

Toll 801-544-8771

Toll Free 800-443-2871

Fax 801-544-5896

© 2010 Concrete Coatings Inc.

Cat 1/10



**BELL
PRINTING
& DESIGN**
(801) 771-1500